
Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed November 04, 2014

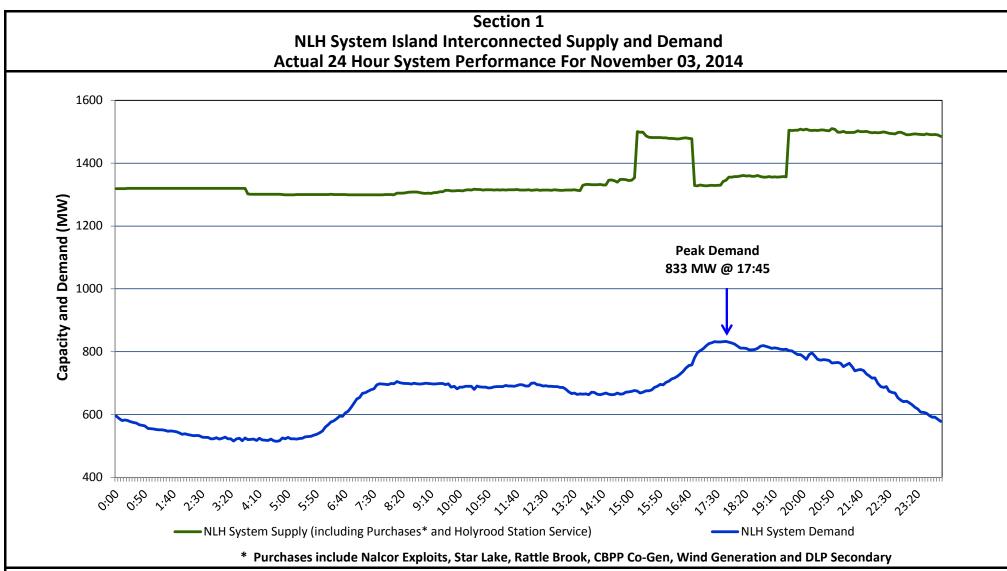

Supply Notes for November 03, 2014

- As of 0858 hours, June 13, 2014, Stephenville Gas Turbine End A removed from service for annual maintenance (25 MW).
- As of 1100 hours, July 21, 2014, Holyrood Unit 1 removed from service for annual maintenance (170 MW).
- As of 0826 hours, October 04, 2014, Stephenville Gas Turbine End B removed from service. Previously derated to 18 MW (25 MW).
- At 0346 hours, November 03, 2014, Star Lake Unit tripped offline. Unit returned to service at 1331 hours (18 MW).
- At 1504 hours, November 03, 2014, Holyrood Unit 3 returned to service. At 1645 hours, unit tripped offline. At 1931 hours, unit returned to service. (150 MW).
- At 1738 hours, November 03, 2014, Nalcor Exploits Unit 9 returned to service (30 MW).

Section 2 NLH System Island Interconnected Supply and Demand									
November 4, 2014 NLH System Outlook ³		Five-Day Forecast	Temperature (°C)		NLH System Demand (MW)				
				Morning	Evening	Morning	Evening		
Available NLH System Supply:4	1,290	MW	Tuesday, November 04, 2014	8	6	800	950		
Current St. John's Temperature:	7	°C	Wednesday, November 05, 2014	3	3	925	1,025		
Current St. John's Windchill:	N/A	°C	Thursday, November 06, 2014	9	7	850	975		
NLH System Peak Demand Forecast:	950	MW	Friday, November 07, 2014	4	7	950	925		
			Saturday, November 08, 2014	11	11	750	800		

Supply Notes for November 04, 2014³

- At 0715 hours, November 04, 2014, Bay d'Espoir Unit 5 removed from service for annual maintenance (76.5 MW).
- At 0715 hours, November 04, 2014, Bay d'Espoir Unit 6 removed from service for maintenance (76.5 MW)

- Notes: 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
 - 2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as underfrequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Underfrequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
 - 3. As of 0800 Hours.
 - Gross output including station service at Holyrood (24.5 MW) and improved hydraulic output due to water levels (35 MW). Includes Nalcor Exploits, Star Lake, Rattle Brook, CBPP Co-Gen. Excludes wind generation and DLP Secondary.

Section 3 Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak							
November 3, 2014	Actual NLH System Island Interconnected Peak Demand ¹	17:45	833 MW				
November 4, 2014	Forecast NLH System Island Interconnected Peak Demand		950 MW				
November 3, 2014	Actual Total Island Peak Demand ²	17:50	986 MW				
November 4, 2014	Forecast Total Island Peak Demand		1,075 MW				

- Notes: 1. NLH System Island Interconnected is supplied by generation owned by NLH as well as NLH Power Purchases as detailed in Section 1 above.
 - 2. Total Island System Demand is supplied by NLH generation and NLH Power Purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper to meet their respective supply needs.