

Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed Monday, December 21, 2020



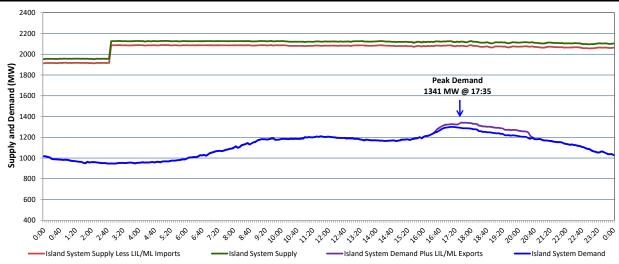

Supply Notes For December 19, 2020

1,2

As of 1903 hours, December 18, 2020, Hawkes Bay Diesel Plant available at 2.5 MW (5 MW).

At 0248 hours, December 19, 2020, Holyrood Unit 2 available (170 MW).

Section 2 Island Interconnected Supply and Demand

isiana interconnected supply and beniana											
Sun, Dec 20, 2020	Island System Outlook ³			Seven-Day Forecast	Temperature (°C)		Island System Daily Peak Demand (MW)				
					Morning	Evening	Forecast	Adjusted ⁷			
Available Island System Supply:5		2,085	MW	Sunday, December 20, 2020	-3	-5	1,370	1,266			
NLH Island Generation: ⁴		1,690	MW	Monday, December 21, 2020	-6	2	1,380	1,276			
NLH Island Power Purchases: ⁶		105	MW	Tuesday, December 22, 2020	5	6	1,210	1,108			
Other Island Generation:		250	MW	Wednesday, December 23, 2020	2	-1	1,335	1,232			
ML/LIL Imports:		40	MW	Thursday, December 24, 2020	-2	-2	1,335	1,232			
Current St. John's Temperature & Windchill:	-3	-7	°C	Friday, December 25, 2020	2	4	1,155	1,054			
7-Day Island Peak Demand Forecast:		1,380	MW	Saturday, December 26, 2020	1	5	1,175	1,073			

Supply Notes For December 20, 2020

Notes:

- 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
- 2. Due to the Island system having no synchronous connections to the larger North American grid, when there is a sudden loss of large generating units there may be a requirement for some customer's load to be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding (UFLS), is necessary to ensure the integrity and reliability of system equipment. Under frequency events have typically occurred 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes. With the activation of the Maritime Link frequency controller during the winter of 2018, UFLS events have occurred less frequently.
- 3. As of 0800 Hours.
- 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
- 5. Gross output from all Island sources (including Note 4).
- 6. NLH Island Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Wind Generation and capacity assistance (when applicable).
- 7. Adjusted for curtailable load, market activities and the impact of voltage reduction when applicable ovember

Section 3

Island Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak

Sat, Dec 19, 2020	Actual Island Peak Demand ⁸	17:35	1,341 MW
Sun, Dec 20, 2020	Forecast Island Peak Demand	•	1,370 MW

Notes: 8. Island Demand / LIL / ML Exports (where applicable) is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).